

# fireline

PROTECTION



The complete conventional fire warning system



[www.espuk.com](http://www.espuk.com)



Electronics Line

[www.electronics-line.com](http://www.electronics-line.com)

**ESP - Electronics Line UK Ltd**

Unit 7, Levis Trading Estate, Station Road, Stechford, Birmingham B33 9AE  
Tel: (+44-121) 789 8111 Fax: (+44-121) 789 8055 info@espuk.com



Electronics Line



# MAG4P

## 4 Zone Fire Panel

- 4 programmable zones
- Active end of line monitoring
- 30 fire detectors per zone
- Unlimited number of call points per zone
- Integral manual alarm button
- 'Class change' facility
- Enable/disable security key
- One man walk test facility
- Fire volt free change over relay
- Fault volt free change over relay
- Individual sounder circuit fault ID
- Individual zone/sounder isolate
- BS5839 and EN54 compliant
- CE certified
- Requires only 1x12v battery
- ABS casing



INPUTS	Max detectors per zone	30
	Thresholds for zone conditions	0 - 2 mA (Fault condition) 2 - 6 mA (Normal condition) 6 - 110 mA (Fire condition) 110 mA - Short (Short condition)
POWER	Mains fail consumption	50mA
	Mains supply	230 VAC ± 10%
	Standby supply	1 x 12V S.L.A Battery (upto 8ah)
	Power availability	0.7 amps
OUTPUTS	Sounder 1	24V (max 300mA fused)
	Sounder 2	24V (max 300mA fused)
	Fault relay	Volt free 500mA (maximum load)
	Auxiliary output	24VDC (300mA fused)
	ENVIRONMENT	Working Temperature
	Storage Temperature	-20 to 60 °C
	Humidity	0 - 95%
	Dimensions (mm)	340W 290H 100D
	Weight	2.5 KG



# MAG4

## 4 Zone Fire Panel

- 4 programmable zones
- Active end of line monitoring
- 30 fire detectors per zone
- Unlimited number of call points per zone
- Integral manual alarm button
- 'Class change' facility
- Enable/disable security key
- One man walk test facility
- Fire volt free change over relay
- Fault volt free change over relay
- Individual sounder circuit fault ID
- Individual zone/sounder isolate
- BS5839 and EN54 compliant
- CE certified
- Requires only 1x12v battery
- Metal casing



INPUTS	Max detectors per zone	30
	Thresholds for zone conditions	0 - 2 mA (Fault condition) 2 - 6 mA (Normal condition) 6 - 110 mA (Fire condition) 110 mA - Short (Short condition)
POWER	Mains fail consumption	50mA
	Mains supply	230 VAC ± 10%
	Standby supply	1 x 12V S.L.A Battery (upto 8ah)
	Power availability	0.7 amps
OUTPUTS	Sounder 1	24V (max 300mA fused)
	Sounder 2	24V (max 300mA fused)
	Fault relay	Volt free 500mA (maximum load)
	Auxiliary output	24VDC (300mA fused)
	ENVIRONMENT	Working Temperature
	Storage Temperature	-20 to 60 °C
	Humidity	0 - 95%
	Dimensions (mm)	320W 220H 80D
	Weight	3.5 KG





# MAG8

## 4 Zone Fire Panel expandable to 8 zones

- 4 programmable zones
- Expandable to 8 zones VIA MAGZC
- Active end of line monitoring
- 30 fire detectors per zone
- Unlimited number of call points per zone
- Integral manual alarm button
- Repeater facility
- Zone operated relay facility
- 'Class change' facility
- Enable/disable security key
- One man walk test facility
- Fire volt free change over relay
- Fault volt free change over relay
- Individual sounder circuit fault ID
- Individual zone/sounder isolate
- Alarm delay options
- BS5839 and EN54 compliant
- CE certified
- Requires 2 x 12V batteries
- Metal casing



INPUTS	Max. detectors per zone	30
	Thresholds for zone conditions	0 - 2 mA (Fault condition) 2 - 6 mA (Normal condition) 6 - 110 mA (Fire condition) 110mA - + Short (Short condition)
POWER	Mains fail consumption	85mA
	Mains supply	230 VAC ± 10%
	Standby supply	2 x 12V SLA batteries (upto 8ah) each
	Power availability	0.7 amps
OUTPUTS	Sounder 1	24V (max 500mA fused)
	Sounder 2	24V (max 500mA fused)
	Fault relay	Volt free 500mA (maximum load)
	Auxiliary output	24VDC (500mA fused)
	ENVIRONMENT	Working Temperature
	Storage Temperature	-20 to 60 °C
	Humidity	0 to 95%
	Dimensions (mm)	350W 370H 100D
	Weight	6.2 KG



# MAG16

## 12 Zone Fire Panel expandable to 16 zones

- 12 programmable zones
- Expandable to 16 zones VIA MAGZC
- Active end of line monitoring
- 30 fire detectors per zone
- Unlimited number of call points per zone
- Integral manual alarm button
- Repeater facility
- Zone operated relay facility
- 'Class change' facility
- Enable/disable security key
- One man walk test facility
- Fire volt free change over relay
- Fault volt free change over relay
- Individual sounder circuit fault ID
- Individual zone/sounder isolate
- Alarm delay options
- BS5839 and EN54 compliant
- CE certified
- Requires 2 x 12V batteries
- Metal casing



INPUTS	Max. detectors per zone	30
	Thresholds for zone conditions	0 - 2 mA (Fault condition) 2 - 6 mA (Normal condition) 6 - 110 mA (Fire condition) 110mA - + Short (Short condition)
POWER	Mains fail consumption	125mA
	Mains supply	230 VAC ± 10%
	Standby supply	2 x 12V SLA batteries (upto 8ah) each
	Power availability	0.7 amps
OUTPUTS	Sounder 1	24V (max 500mA fused)
	Sounder 2	24V (max 500mA fused)
	Fault relay	Volt free 500mA (maximum load)
	Auxiliary output	24VDC (500mA fused)
	ENVIRONMENT	Working Temperature
	Storage Temperature	-20 to 60 °C
	Humidity	0 to 95%
	Dimensions (mm)	350W 440H 100D
	Weight	8.5 KG



# WARNING & DETECTION

The new range of Fireline detectors have been developed to provide a perfect compliment to the Fireline Mag panels. All detectors are supplied with a diode base, and conform to the latest EN54 standards.

Their smooth aesthetics and competitive pricing will make them more than suitable for the majority of conventional installations.




**PSD-1**  
Optical smoke detector

**CSD-1**  
Combined optical smoke & rate of rise heat detector

**FHD-1**  
Fixed temperature heat detector

**RHD-1**  
Rate of rise heat detector

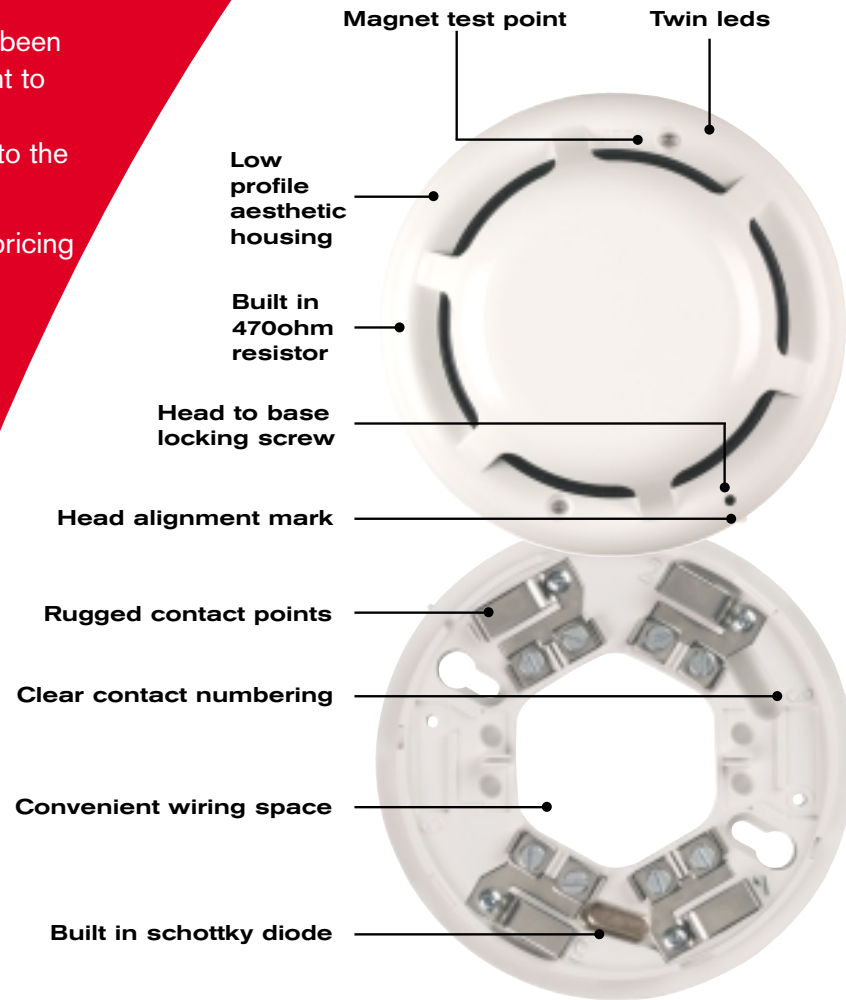

MODEL	PSD-1	CSD-1	FHD-1	RHD-1
DESCRIPTION	Optical smoke	Combined smoke/heat	Fixed temp heat	Rate of rise heat
TYPE	Conventional	Conventional	Conventional	Conventional
APPROVAL	EN54-7	EN54-7, EN54-5	EN54-5	EN54-5
CLASS	N/A	A2R	A1S	A1R
OPERATING VOLTAGE	15 - 30VDC	15 - 30VDC	15 - 30VDC	15 - 30VDC
STANDBY CURRENT	60uA @ 22.5VDC	80uA @ 22.5VDC	40uA @ 22.5VDC	40uA @ 22.5VDC
ALARM CURRENT	48 - 52ma @22.5VDC	48 - 52ma @22.5VDC	48 - 52ma @22.5VDC	48 - 52ma @22.5VDC
WIRE GAUGE	0.35 - 1.0mm TWIN	0.35 - 1.0mm TWIN	0.35 - 1.0mm TWIN	0.35 - 1.0mm twin
OPERATING TEMPERATURE	-10°C to 60°C	-10°C to 60°C	-10°C to 90°C	-10°C to 90°C
TEST FACILITY	Magnet	Magnet	Magnet	Magnet



## SCP-1

Surfacing mounting call point

Spare glasses available in packs of 10 (SCPG1)"



## FCP-2

Flush mounting call point

Spare glasses available in packs of 10 (SCPG2)"



**BA-1R**  
RED BANSHEE sounder



**BA-1W**  
WHITE BANSHEE sounder



**BS-1R**  
RED BEDROOM sounder



**BS-1W**  
WHITE BEDROOM sounder



**DBS-1**  
DETECTOR BASE sounder



**MA-1**  
MULTI ALERT sounder

MODEL	BA-1R/BA-1W	BS-1R/BS-1W	DBS-1	MA-1
DESCRIPTION	BANSHEE sounder	BEDROOM sounder	DETECTOR BASE sounder	MULTI ALERT sounder
SOUND OUTPUT @ 1M	87 - 112 dBA	90 dBA	93 dBA	103 dBA
CURRENT	6 - 30 mA	7 mA	18 mA	15 mA
IP RATING	IP45	N/A	N/A	IP55

# WARNING DEVICES



**IFB-1**  
6" INTERNAL fire BELL



**WFB-1**  
8" WEATHERPROOF fire BELL



**FS-1** 1 WATT STROBE  
**FS-2** 2 WATT STROBE  
**FS-3** 3 WATT STROBE



**ZLR2**  
REMOTE LED indicator plate



**CB-1**  
combined BANSHEE  
sounder + STROBE



**CB-2**  
combined MULTI ALERT  
sounder + STROBE

MODEL	IFB-1	WFB-1	FS-1/2/3	ZLR2	CB-1	CB-2
SOUND OUTPUT @ 1M	95 dBA	95 dBA	N/A	N/A	87 - 112 dBA	88 - 103 dBA
FLASH RATE	N/A	N/A	60 / minute	permanent	60 / minute	40 / minute
CURRENT	11 mA	25 mA	42, 84, 126 mA	minimal	40 mA + sounder	40 mA
IP RATING	IP55* (TBC)	IP55* (TBC)	IP65	internal use only	IP45	IP55

# ACCESSORIES



**BAT28**  
12V 2.8ah SLA BATTERY



**BAT7**  
12V 7.0ah SLA BATTERY



**DR916-24**  
24V DC DOOR HOLDER



**DR916-240**  
240V AC DOOR HOLDER



**DR916-FMB**  
FLOOR MOUNTING BRACKET  
(for use with DR916-24/240)



**DR916-KP**  
SPARE KEEPER PLATE  
(for use with DR916-24/240)



**BPS-1**  
24V 1 AMP BOXED POWER SUPPLY

**BPS-2**  
24V 2 AMP BOXED POWER SUPPLY

**BPS-5**  
24V 5 AMP BOXED POWER SUPPLY

\* boxed power supplies require  
2 x 12V batteries (not supplied)